


# VentA-Hood® WALL MOUNT RANGE HOOD SPECIFICATIONS

PRH18-M/PRXH18-M Equipped with halogen lighting. X in part number indicates 27" depth. M600 and M1200 blowers are sold separately. Features stainless steel baffle filters.


## Available Widths

30", 36", 42", 48",  
54", 60", & 66"

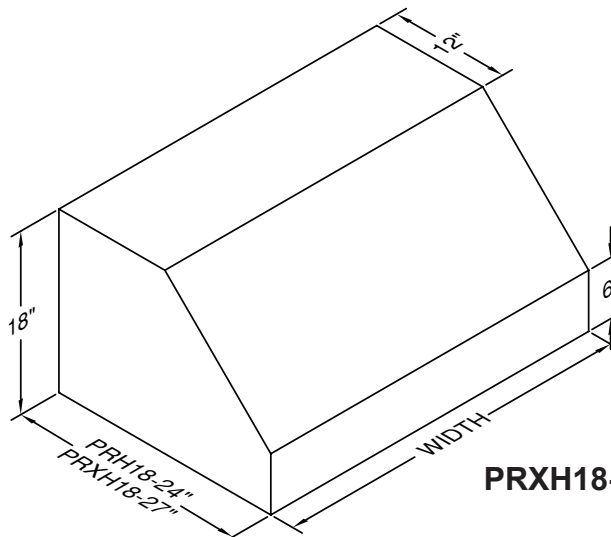


PRXH18-M/PRXH18-M

## M600 Connection Diagram

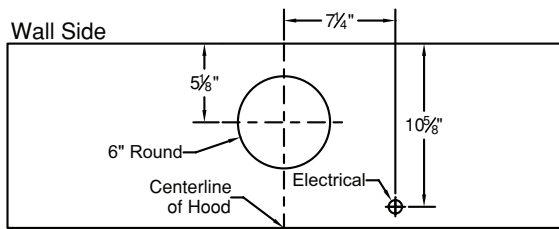


Single Blower  
(Top View)

## M1200 Connection Diagram

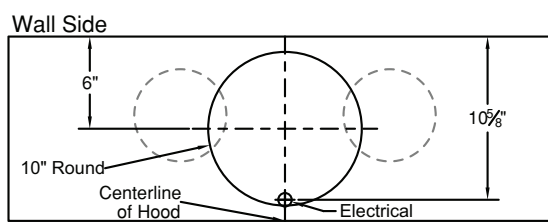


Dual Blower with VP566 Transition  
(Top View, see below for others)

## Recommended Mounting Height\*

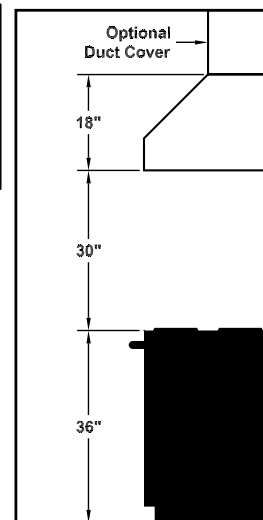


\*Recommended mounting height is for optimum performance.

## VP566 Transition Details (Included with M1200)

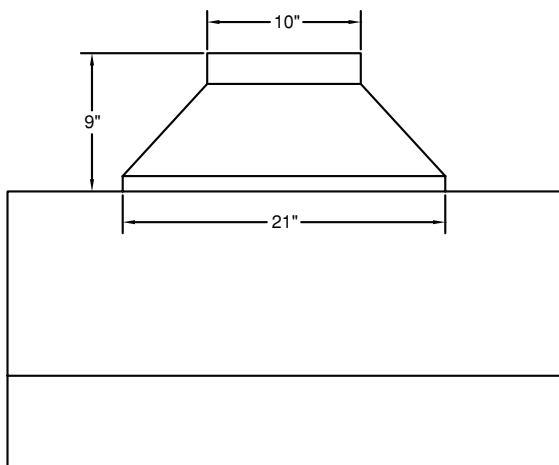

VP566 Transition  
(Front View)

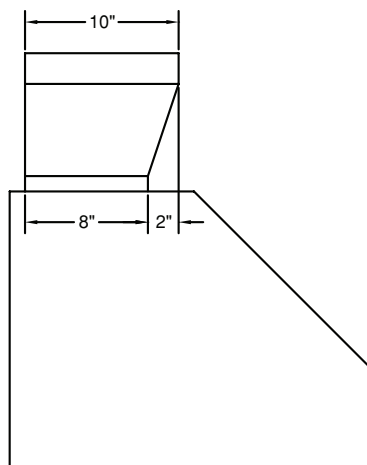

VP566 Transition  
(Side View)

SPEED	CFM @ 0.1" S.P.		
	M600	WHM300*	M1200
1	240	240	420
2	300	300	645
3	500	-	865
4	625	-	1015

\* The WHM300 is a wiring harness that when used with the M600 blower (sold separately) will disable the blower speeds exceeding 300 CFM.

## Electrical/Mechanical Specifications For Blower Units

Model	Volts	Amps*	Hz	CFM SP@0.0"	CFM SP@0.1"	CFM SP@0.25"	CFM SP@0.5"	CFM SP@0.75"	Minimum Round Duct Size
M600 Single	115	5.0	60	630	625	615	600	580	6" (28 in. <sup>2</sup> )
M600 w/WHM300 Harness	115	5.0	60	302	300	295	288	278	6" (28 in. <sup>2</sup> )
M1200 Dual	115	10.0	60	1035	1015	1000	955	915	10" (79 in. <sup>2</sup> )

\* Add 0.5 amp for each halogen light. Hoods are available with halogen lights (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54"-66").

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Rev. 0514A

